
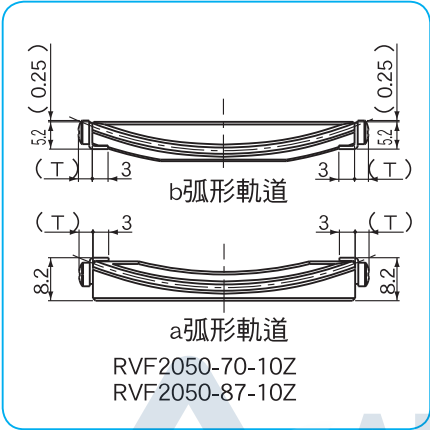
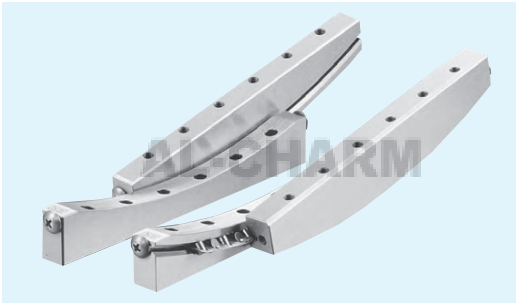


RVF型


— 平面安裝型 —

規格構成

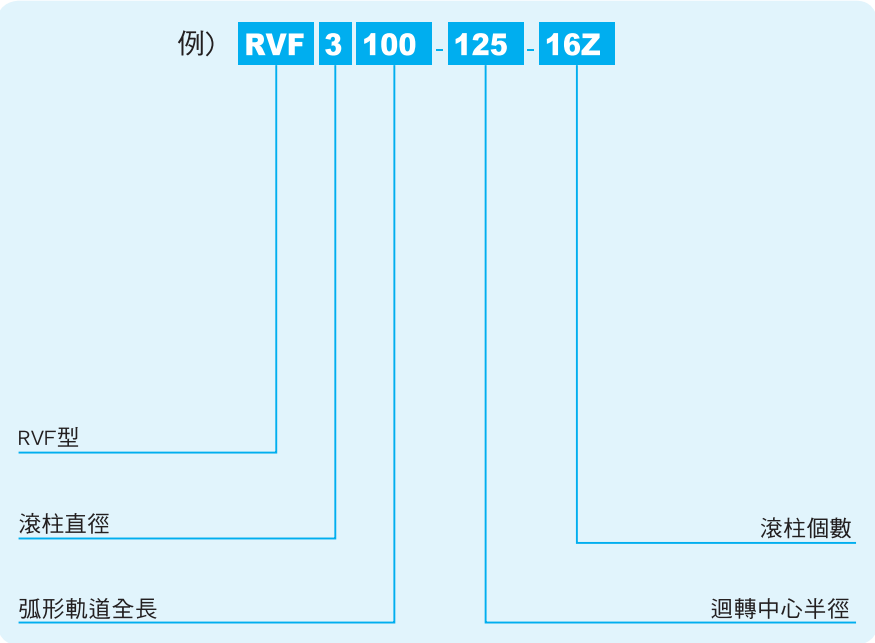

規 格	迴轉範圍	滾柱徑 D mm	滾柱數 Z	主要尺寸									
				L	R	R ₁	R ₂	H ₁	H ₂	h ₁	h ₂	A	B
				mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
RVF2050- 70-10Z	± 5°	2	10	50	70	67	73	72.5	64.5	7.5	7.5	15	7.25
RVF2050- 87-10Z			10		87	84	89.5	89.5	81.5	7.5	7.5		
RVF2050-103-10Z			10		103	100	106	105.5	97.5	7.5	8		
RVF2050-120- 9Z			9		120	117	123	122.5	114.5	7.5	8		
RVF3070- 85-10Z	±10°	3	10	70	85	81	89	89.5	75.5	14	12.5	18	8.5
RVF3070-110-10Z			10		110	106	114	114.5	100.5	12.8	12.5		
RVF3100-125-16Z			16	100	125	121	129	129.5	110.5	17.5	18		8.5
RVF3100-160-14Z			14		160	156	164	164.5	145.5	15	18		

※ 珠排型式請參考P.G-64

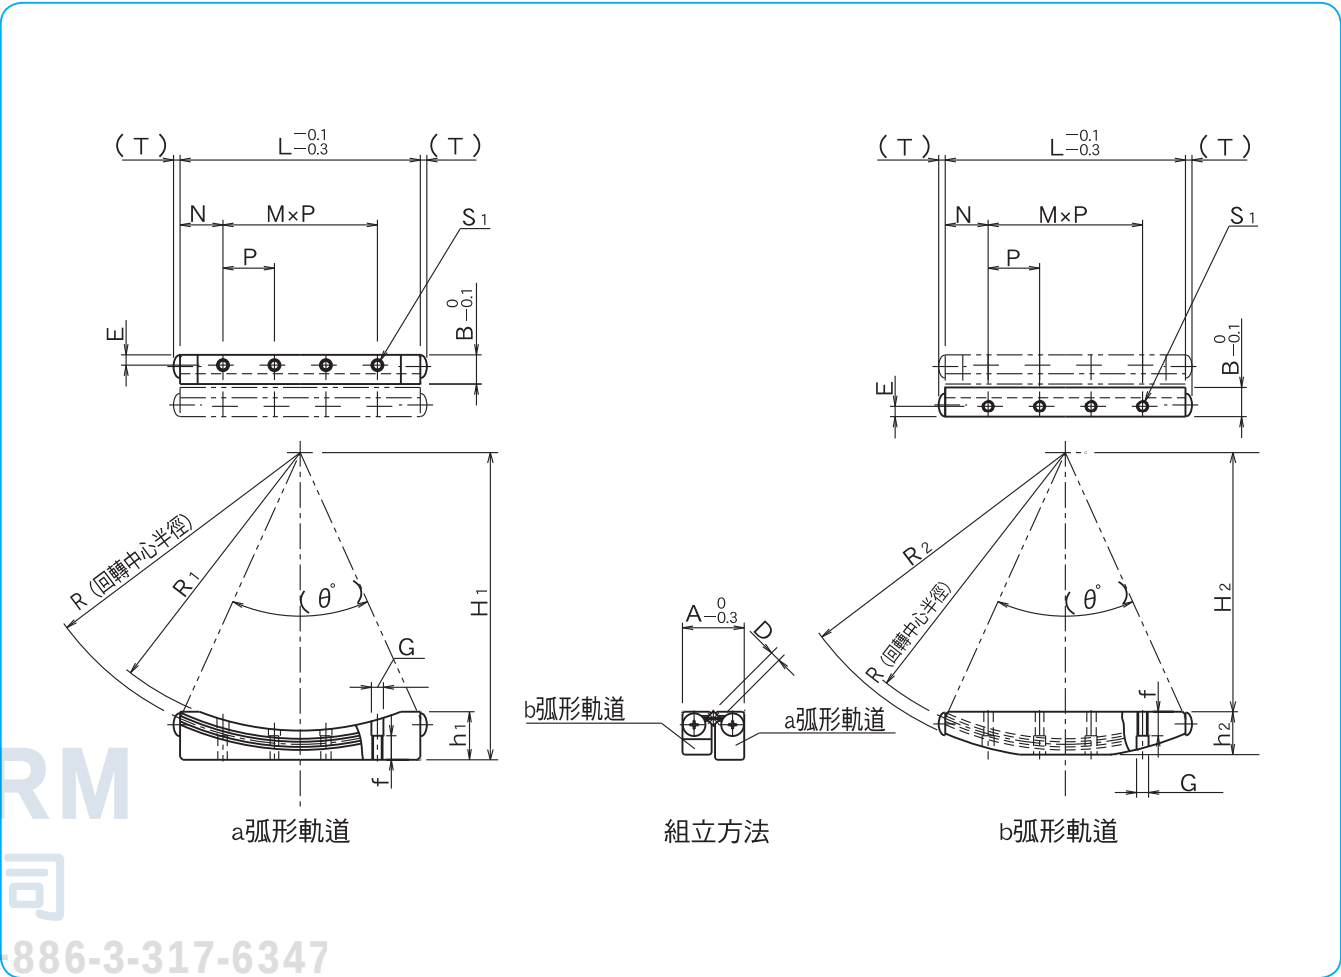

※a、b弧形軌道各2支、弧形滾柱珠排2支、阻擋件8個、端面基準板2個為1組

								基本額定荷重		容許荷重	質量	規 格
								動 C N	靜 Co N	F N	g	
M×P	N	E	S ₁	f	G	T	θ°					
mm	mm	mm		mm	mm	mm						
3×12.5	6.25	2.5	M2.5	4	3	2.7	41.8°	1,180	2,400	800	66	RVF2050- 70-10Z
							33.3°	1,060	2,430	810	70	RVF2050- 87-10Z
3×13	5.5	2.5	M2.5	4	3	1.5	28.0°	998	2,440	815	70	RVF2050-103-10Z
							24.0°	751	1,970	657	70	RVF2050-120- 9Z
3×15	12.5	3	M3	7	3.5	1.9	48.6°	2,680	5,530	1,840	182	RVF3070- 85-10Z
							37.1°	2,440	5,620	1,870	182	RVF3070-110-10Z
5×15	12.5	3	M3	7	3.5	1.9	47.1°	3,520	8,850	2,950	327	RVF3100-125-16Z
							36.4°	2,860	7,890	2,630	323	RVF3100-160-14Z

1N≒0.102kgf