

SSP型

— 標準圓筒型 —

規格構成

例) **SSP 80 L 2 T1 600 P / CU**規格
SSP：標準規格
SSPS：耐蝕規格

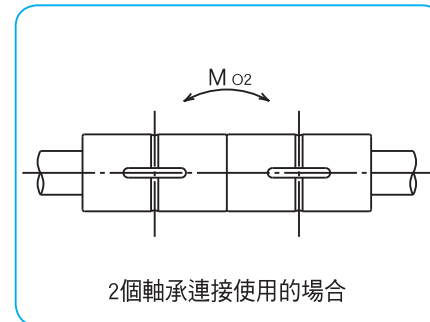
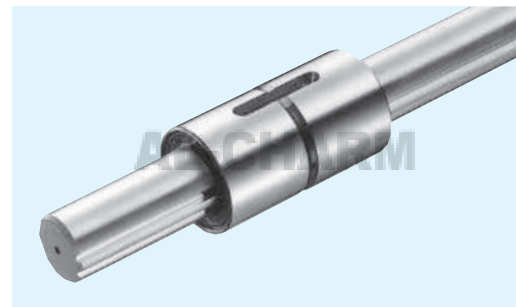
軸徑

軸承長度
無記入：標準
L：加長型單軸上配合軸承個數
註：保持器材質為樹脂

特殊規格記號

精度等級
無記入：上級
P：精密級

栓槽軸心全長

預壓記號
無記入：標準
T1：輕預壓
T2：中預壓

AL-CHARM
好晟企業股份有限公司

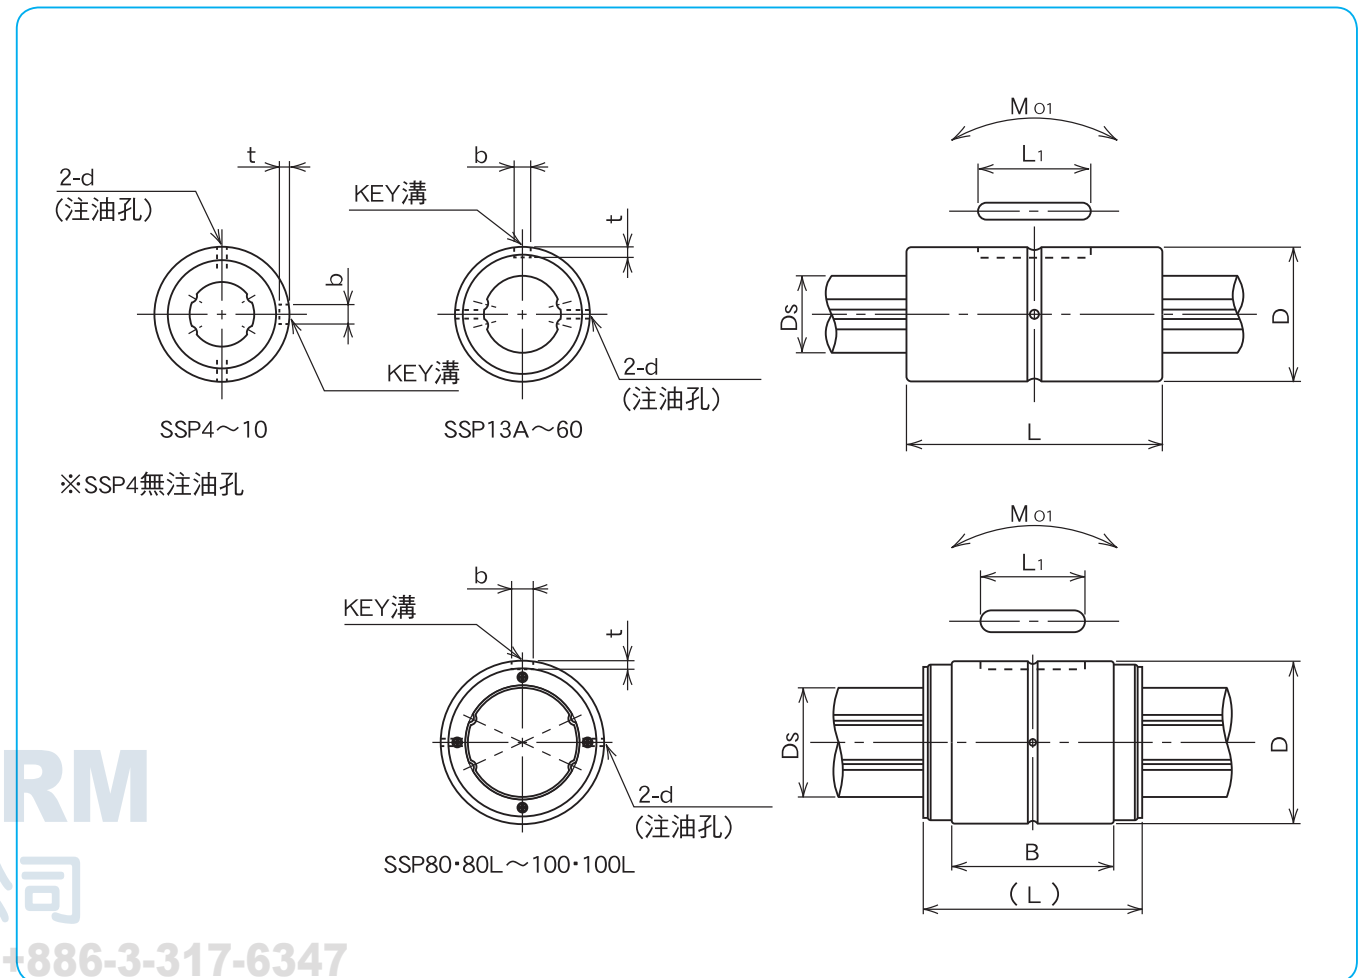
TEL：+886-3-317-1155 FAX：+886-3-317-6347

上海好承傳動元件有限公司

TEL：+86-21-62325024~27 FAX：+86-21-62325023

http://www.al-charm.com

標準規格		主要尺寸									
標準規格	耐蝕規格	D		L		B mm	b		t +0.05 0 mm	L ₁ mm	d mm
		mm	容許差 μm	mm	容許差 mm		mm	容許差 μm			
SSP 4	SSPS 4	10	0/-9	16	0 -0.2	—	2	+14 0	1.2	6	—
SSP 6	SSPS 6	14	0	25			2.5		1.2	10.5	1
SSP 8	SSPS 8	16	-11	25			2.5		1.2	10.5	1.5
SSP 10	SSPS10	21	0	33			3		1.5	13	1.5
SSP 13A	SSPS13A	24	-13	36			3		1.5	15	1.5
SSP 16A	SSPS16A	31	0	50	0 -0.3	—	3.5	+18 0	2	17.5	2
SSP 20A	SSPS20A	35		63			4		2.5	29	2
SSP 25A	SSPS25A	42		-16			71		4	2.5	36
SSP 30A	—	47	80	4			2.5		42	3	
SSP 40A	—	64	0	100			6		3.5	52	4
SSP 50A	—	80	-19	125	8	+22/0	4	58	4		
SSP 60A	—	90	0 -22	140	12	+27 0	5	67	4		
SSP 80	—	120		160	—		118.2	16	6	76	5
SSP 80L	—	120		217			175.2				
SSP 100	—	150	0	185		132.6	20	+33 0	7	110	5
SSP 100L	—	150	-25	248	195.6						
SSP 20	SSPS20	32	0 -16	60	0 -0.3	—	4	+18	2.5	26	2
SSP 25	SSPS25	37		70			5	0	3	33	3
SSP 30	—	45	80	7			+22	4	41	3	
SSP 40	—	60	0	100			10	0	4.5	55	4
SSP 50	—	75	-19	112			15	+27	5	60	4
SSP 60	—	90	0/-22	127	18	0	6	68	4		



基本額定扭力矩		基本額定荷重		靜的容許撓曲力矩		質量		規格	
動 C _T N·m	靜 Co _T N·m	動 C kN	靜 Co kN	Mo1 N·m	Mo2 N·m	軸承 kg	軸心 kg/m		
4	0.74	0.86	1.22	1.97	10.3	0.0065	0.10	4	
6	1.5	2.4	2.28	5.1	40	0.019	0.21	6	
8	2.1	3.7	2.87	7.4	50	0.023	0.38	8	
10	4.4	8.2	5.07	18.0	116	0.054	0.60	10	
13	21	39.2	2.67	13.7	109	0.07	1.0	13A	
16	60	110	6.12	46	299	0.15	1.5	16A	
20	105	194	8.9	110	560	0.22	2.4	20A	
25	189	346	12.8	171	1,029	0.33	3.7	25A	
30	307	439	18.6	181	1,470	0.36	5.38	30A	
40	674	934	30.8	358	2,940	0.95	9.55	40A	
50	1,290	2,950	40.3	690	4,080	1.9	15.0	50A	
60	1,570	2,620	47.7	881	5,470	2.3	21.6	60A	
80	3,860	6,230	83.1	2,000	11,100	5.1	39	80	
	5,120	9,340	110	4,410	21,100	7.6		80L	
100	6,750	11,500	135	3,360	19,300	9.7	61	100	
	8,960	17,300	179	7,340	37,700	13.9		100L	
18.2	83	133	7.84	63	500	0.2	2.0	20	
23	162	239	12.3	104	830	0.22	3.1	25	
28	289	412	18.6	181	1,470	0.35	4.8	30	
37.4	637	882	30.8	358	2,940	0.81	8.6	40	
47	1,390	3,180	46.1	696	4,400	1.5	13.1	50	
56.5	2,100	4,800	58.0	1,300	8,800	2.5	19	60	

1kN≒102kgf 1N·m≒0.102kgf·m