
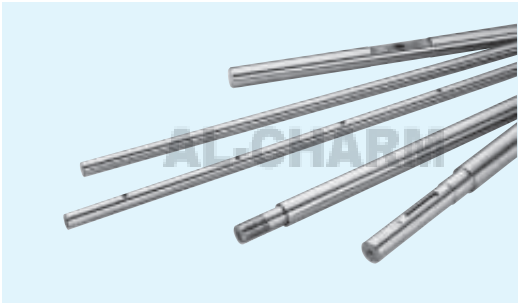


SN型

— NB實心軸 —





規格構成

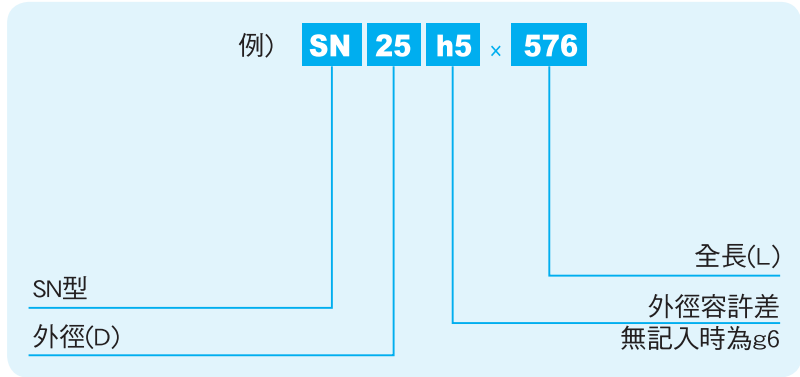

SNS型

— NB不鏽鋼軸心 —

規格構成

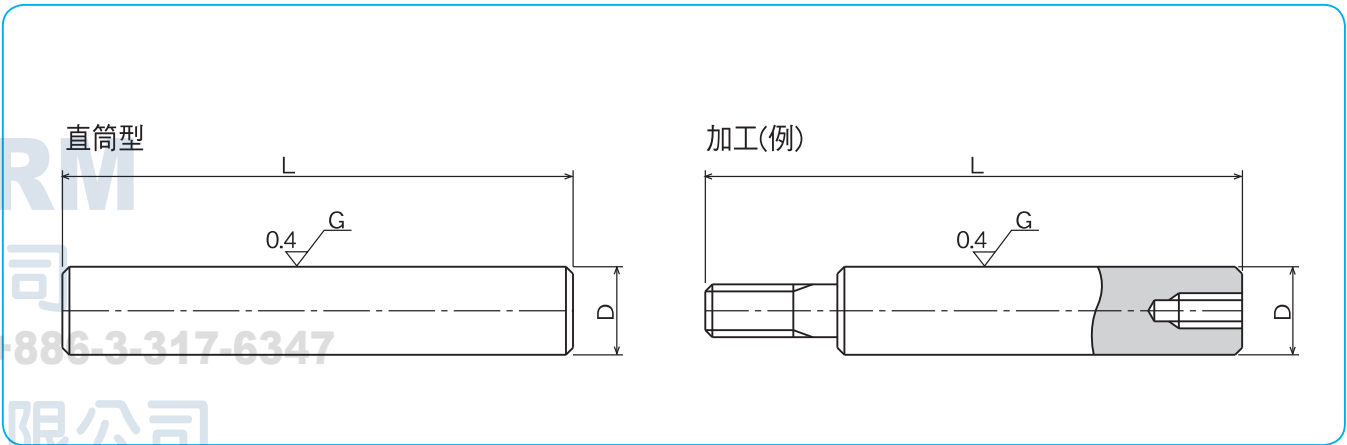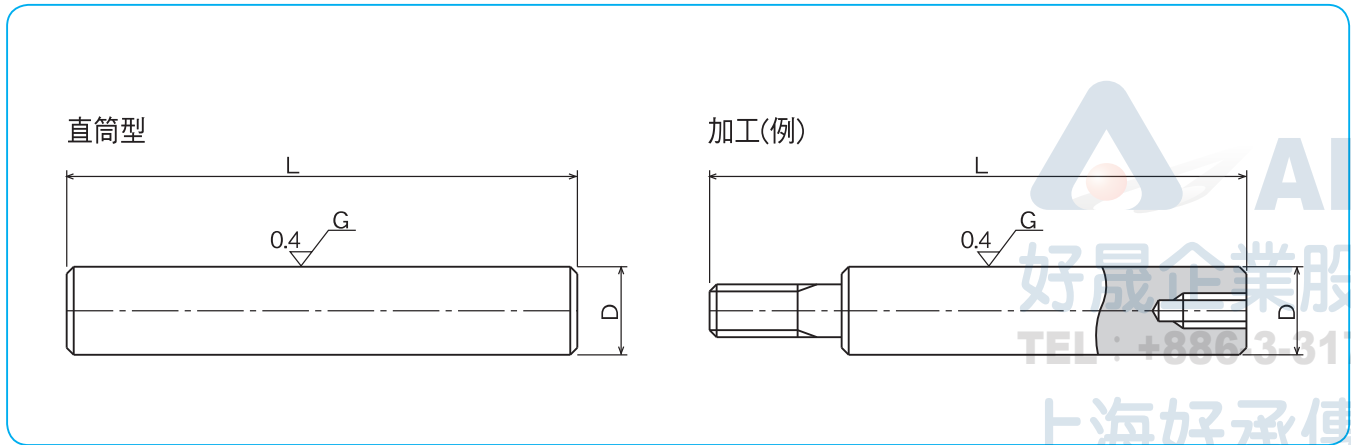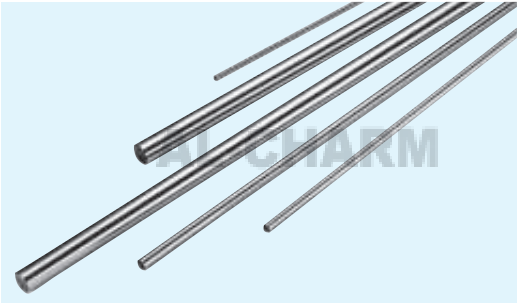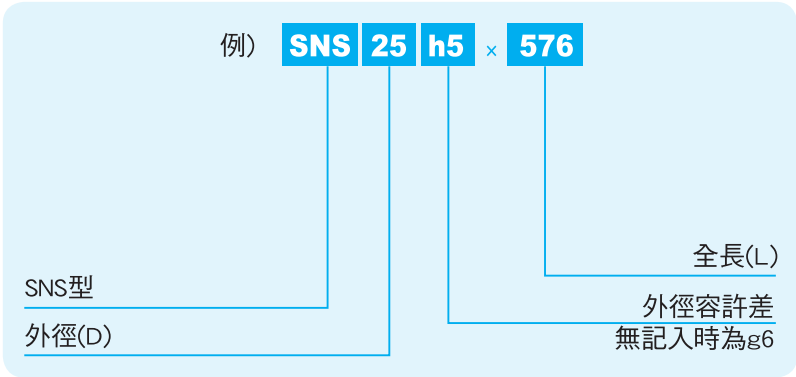

規格	外徑 D mm	容許差 g6* μm	全長 L mm	質量 Kg/m
SN 3	3	-2/-8	50 → 400	0.06
SN 4	4	-4	100 → 500	0.10
SN 5	5	-12	100 → 700	0.16
SN 6	6	-12	100 → 1000	0.23
SN 8	8	-5	200 → 1500	0.40
SN 10	10	-14	200 → 2000	0.62
SN 12	12	-6	200 → 3000	0.89
SN 13	13	-6	200 → 3000	1.04
SN 15	15	-17	300 → 4000	1.39
SN 16	16	-17	300 → 4000	1.58
SN 20	20	-7	300 → 5000	2.47
SN 25	25	-20	300 → 6000	3.85
SN 30	30	-20	300 → 6000	5.55
SN 35	35	-9	400 → 6000	7.55
SN 40	40	-9	400 → 6000	9.87
SN 50	50	-25	500 → 6000	15.4
SN 60	60	-10	600 → 6000	22.2
SN 80	80	-29	800 → 6000	39.5
SN 100	100	-12	1000 → 6000	61.7
SN 120	120	-34	1500 → 4500	88.8
SN 150	150	-14/-39	1500 → 4500	139

材質：軸承鋼(SUJ2) 硬度：60HRC(697HV)以上
* 也接受g6以外的訂製。

規格	外徑 D mm	容許差 g6* μm	全長 L mm	質量 Kg/m
SNS 3	3	-2/-8	50 → 300	0.06
SNS 4	4	-4	100 → 400	0.10
SNS 5	5	-12	100 → 500	0.16
SNS 6	6	-12	100 → 600	0.22
SNS 8	8	-5	200 → 1000	0.39
SNS 10	10	-14	200 → 1500	0.61
SNS 12	12	-6	200 → 2500	0.88
SNS 13	13	-6	200 → 3000	1.03
SNS 16	16	-17	300 → 4000	1.56
SNS 20	20	-7	300 → 5000	2.43
SNS 25	25	-20	300 → 6000	3.80
SNS 30	30	-20	300 → 6000	5.48
SNS 35	35	-9	400 → 6000	7.46
SNS 40	40	-9	400 → 6000	9.75
SNS 50	50	-25	500 → 6000	15.2
SNS 60	60	-10	600 → 6000	21.9
SNS 80	80	-29	800 → 6000	39.0
SNS 100	100	-12/-34	1000 → 6000	60.9

材質：麻田散鐵不銹鋼(SUS440C相當)
硬度：56HRC(613HV)以上
※ 外徑超過φ80の場合，熱處理範圍為4,500mm以下
* 也接受g6以外的訂製。