


SG0300.5

Shaft dia. (軸徑) $\phi 3$ Lead (導程) 0.5mm

C3

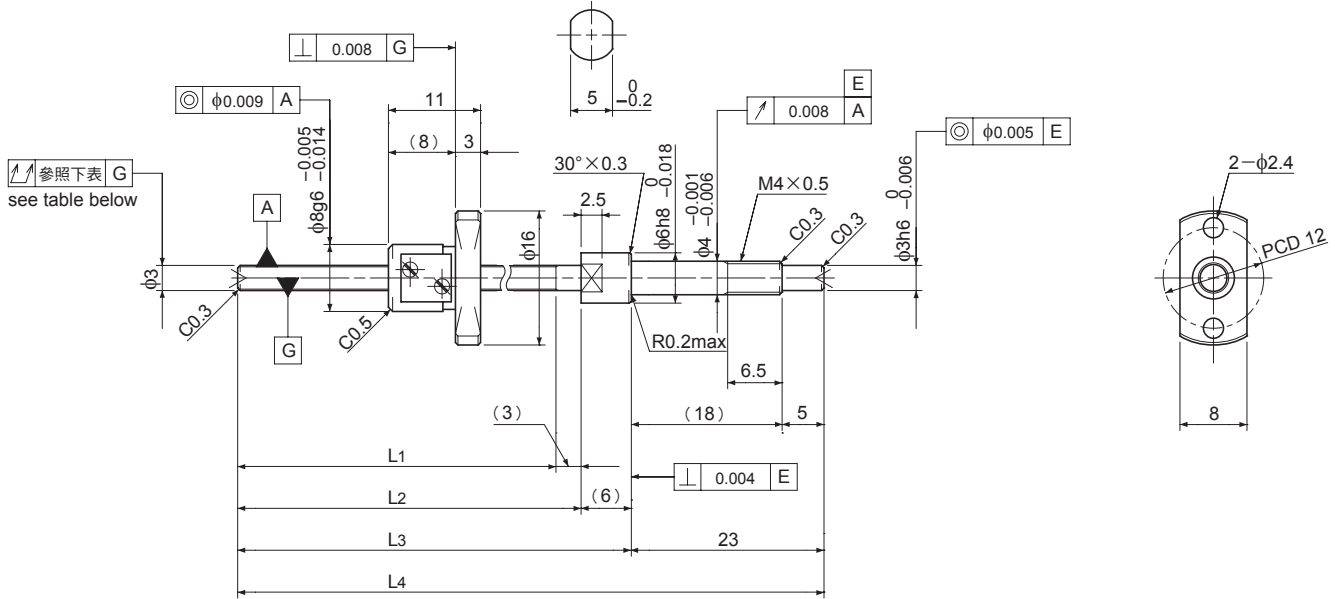


Unit (單位) : mm

Ball Screw Specifications	主要技術參數
Ball size 鋼珠直徑	$\phi 0.4$
Number of thread 螺紋數	1
Thread direction 旋轉方向	Right 右旋
Shaft root dia. 螺桿谷徑	$\phi 2.6$
Number of circuit 循環數	2.7×1
Shaft, Nut material 螺桿、螺帽材質	SCM415H
Surface hardness 螺紋部表面硬度	HRC58~62 (Thread area)
Anti-rust treatment 防鏽處理	Anti-rust oil 防鏽油

Supported-side end-journal profile	支持側軸端加工形狀
------------------------------------	-----------

A型



L5 : Thread length after end-journal machining. 追加工後的螺牙長度
L6 : Total length after end-journal machining. 追加工後的總長度

Support-unit Recommendation 推薦的支持座	Supported-side 支持側	Fixed-side 固定側
	—	MSU-4C/4G,EK4

D-型：上記以外の形狀

Unit (單位) : mm

Ball Screw Model 滾珠螺桿型號	Travel 行程	Grade 精度	Shaft length 螺桿長度				Lead accuracy 導程精度		Total Run-out 偏擺量	Axial play 軸向間隙	Preload Torque 預壓扭矩 Nm	Basic Load Rating 基本額定荷重 N	
			L1	L2	L3	L4	Travel deviation 代表移動量誤差 e_p	Variation 變動 V_u				Dynamic 動額定荷重 C_a	Static 靜額定荷重 C_oa
SG0300.5-038R070C3	25	C3	38	41	47	70	± 0.008	0.008	0.025	~ 0.005	—	150	220

Note) Please refer to P.A-17 for order code of end-journal machining.

註) 追加工的型號指定方式請參照P.A-17。